

# STORMA SERIES 2

LED flood light 100-200W range

## Product Description

### Housing

High purity aluminium die cast material, efficient heatsink design provides excellent heat dissipation.

### Source

LED chip provides high brightness and low energy consumption.

### Driver

Constant current built-in driver.  
PB and HG free, environment friendly.

### Reflector

High purity aluminium reflector provides 120 degree wide light distribution and high brightness.


**Protection rating** IP65.

**Colour** Grey.



## Design Application

General outdoor areas, building facade, signboards, dock, warehouse, garden pool areas, sports areas etc.

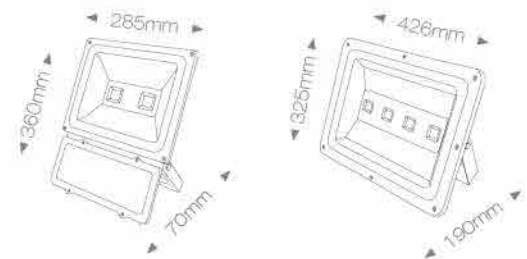

LED Driver	220V	230V	240V	50Hz	60Hz	IP20	I	F	CE	OPTIONS	BLUE COLOUR	RED COLOUR	GREEN COLOUR	YELLOW COLOUR	RGB MULTICOLOUR
------------	------	------	------	------	------	------	---	---	----	---------	-------------	------------	--------------	---------------	-----------------

## Product Range and Reference

Model	Power	Voltage	CRI	Luminous Flux	Colour Temp.	Dimension	Material	Beam Angle
58 016	100W	100 - 240V	>80	6500	6500K	360 x 285 x 70	Aluminum Die Cast.	120 Degree
58 017	100W	100 - 240V	>80	6500	3000K	360 x 285 x 70	Aluminum Die Cast.	120 Degree
58 022	200W	100 - 240V	>80	9200	6500K	325 x 426 x 190	Aluminum Die Cast.	120 Degree
58 023	200W	100 - 240V	>80	9200	3000K	325 x 426 x 190	Aluminum Die Cast.	120 Degree