

TISSI SURFACE SERIES

LED surface flat panel

Product Description

Housing

Body made of high quality, thin and light weight aluminium, easy and flexible installation, High brightness SMD LED as light source provides up to 4000 Lumens. Constant current LED driver included, Hanging/Suspension kit available on option, Optical level diffusion and guide plate, Aluminium shell, static free, corrosion

resistant, Oxidation resistant.

Protection rating IP20

Colour White




Design Application

Commercial and residential buildings, malls, hospitals, schools, lobby, etc.

Installation

Surface mounted.

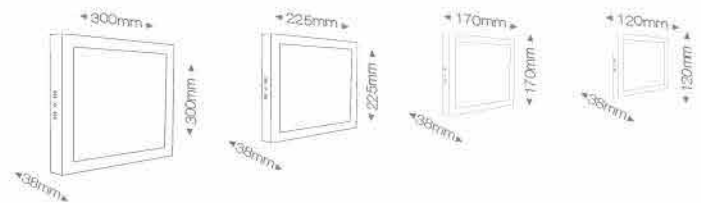

LED Driver: 220V 230V 240V 50Hz 60Hz IP20 I F CE DIMMABLE Driver

Product Range and Reference

Model	Led Type	Watt	Voltage	CCT	Dimension (mm)	Luminous Flux	IP Grade	CRI	Material
50 061	2835	6W	220-240V	6500K	120 x 120 x 38	600 lm	IP20	>75	Aluminium + PC
50 062	2835	6W	220-240V	3500K	120 x 120 x 38	600 lm	IP20	>75	Aluminium + PC
50 064	2835	12W	220-240V	6500K	170 x 170 x 38	1200 lm	IP20	>75	Aluminium + PC
50 065	2835	12W	220-240V	3500K	170 x 170 x 38	1200 lm	IP20	>75	Aluminium + PC
50 067	2835	18W	220-240V	6500K	225 x 225 x 38	1800 lm	IP20	>75	Aluminium + PC
50 068	2835	18W	220-240V	3500K	225 x 225 x 38	1800 lm	IP20	>75	Aluminium + PC
50 070	2835	24W	220-240V	6500K	300 x 300 x 38	2400 lm	IP20	>75	Aluminium + PC
50 041	2835	24W	220-240V	3500K	300 x 300 x 38	2400 lm	IP20	>75	Aluminium + PC