

# RADIANCE SERIES

LED Surface downlight

## Product Description

Surface type LED COB downlight

LED driver included

Aluminium heatsink provides excellent heat dissipation

Aluminium body

Aluminium pure anodized reflector



50 368




50 365

## Design Application

Home, office, Corridor, Halls, reception, meeting rooms, hospitals, schools, shops, laboratory, kitchens etc.

## Installation

Recessed mounted.

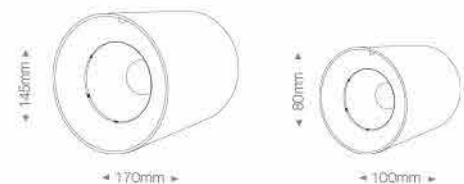

## Product Range and Reference

Model	Led Type	Watt	Voltage	CCT	Dimension	Luminous Flux	IP Grade	CRI	Material
50 365	COB	12W	220-240V	6500K	80 x 100	1000 lm	IP20	>75	Aluminium
50 366	COB	12W	220-240V	3500K	80 x 100	1000 lm	IP20	>75	Aluminium
50 368	COB	24W	220-240V	6500K	145 x 170	2100 lm	IP20	>75	Aluminium
50 369	COB	24W	220-240V	3500K	145 x 170	2100 lm	IP20	>75	Aluminium