

LEDTRONIK LED Highbay


High performance, energy efficient LED high bay





Specification

- 200W, LER >80lm/w
- CCT 6000K or 4000K and CRI >70-85
- Utilises high power LED technology
- 50,000 hrs average rated life*
- Anti corrosion, die cast aluminium body
- High strength casting shell of electrical box, anti static
- IP44 rated gear & LED enclosures
- Safe to touch housing temperature
- Low profile, with suspension hook as standard
- No maintenance
- Integral thermal management
- Easy to install

Dimensions: Unit:mm

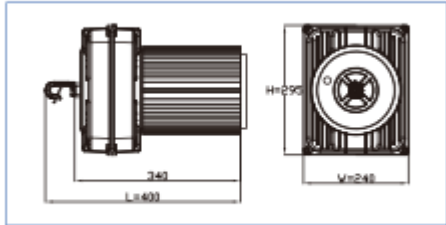

Light distribution curve

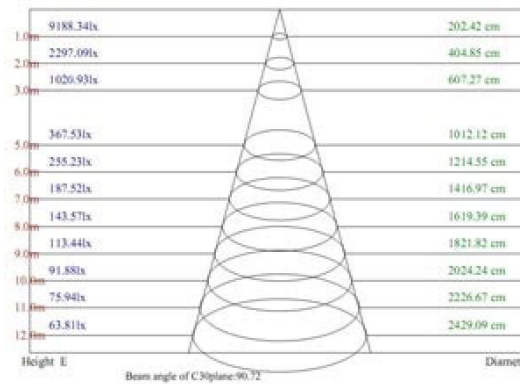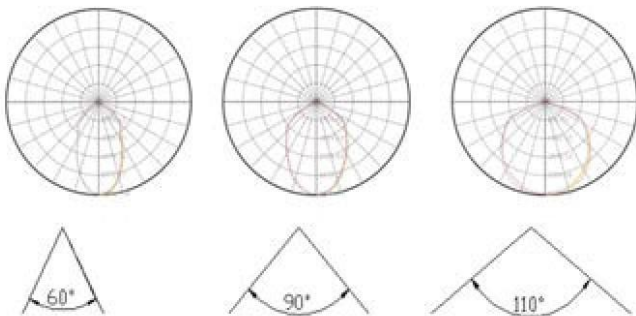

Quick Spec

Light-tek anti corrosion, pressure die cast aluminium body LED high performance, IP44 200W - LER>80lm/w High bay.

Design Application

System is designed for high ceiling industrial spaces, retail distribution centres, storage areas, gymnasiums

Product Codes

Code	Version	Dim (mm)	Mass (kg)
LTLHBG200	200W 4000K	340 X 240	10.0
LTLHBG200	200W 6000K	340 X 240	10.0

CRI: 70-85
 Lumens: 15000 (lm)
 Input: AC:100-277V
 Power Factor: >0.95

Industrial



Light-Tek[®]
 PROFESSIONAL AND HOME LIGHTING