

LUSTRA SERIES

LED recessed glass panel

Product Description


Housing

Body made of high quality, thin and light weight aluminium, easy and flexible installation, High brightness SMD LED as light source provides up to 4000 Lumens. Constant current LED driver included, Hanging/Suspension kit available on option, Optical level diffusion and guide

plate, Aluminium shell, static free, corrosion resistant, Oxidation resistant.

Protection Rating IP20

Colour White

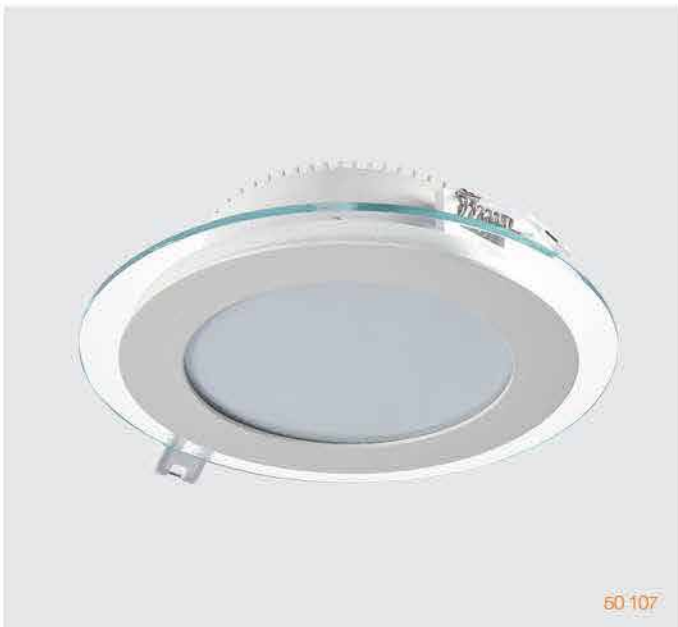


Design Application

Commercial and residential buildings, malls, hospitals, schools, lobby, etc.

Installation

Recessed mounted.

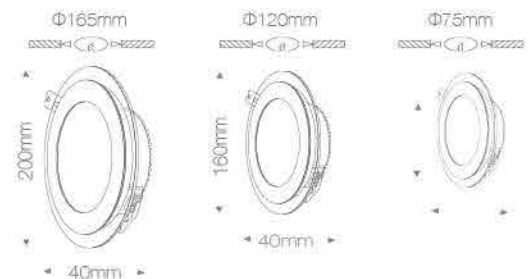

LED Driver 220V 230V 240V 50Hz 60Hz IP20 I F CE DIMMABLE Driver

Product Range and Reference

Model	Led Type	Watt	Voltage	CCT	Dimension	Luminous Flux	IP Grade	CRI	Material
50 101	2835	6W	220-240V	6500K	100 x 40	600 lm	IP20	>75	Aluminium + PC
50 102	2835	6W	220-240V	3500K	100 x 40	600 lm	IP20	>75	Aluminium + PC
50 104	2835	12W	220-240V	6500K	160 x 40	1200 lm	IP20	>75	Aluminium + PC
50 106	2835	12W	220-240V	3500K	160 x 40	1200 lm	IP20	>75	Aluminium + PC
50 107	2835	18W	220-240V	6500K	200 x 40	1800 lm	IP20	>75	Aluminium + PC
50 108	2835	18W	220-240V	3500K	200 x 40	1800 lm	IP20	>75	Aluminium + PC