

# TIERRA LED SERIES

LED underground / burried luminair

## Product Description

High brightness SMD LED as light source, efficient, energy saving, long life span of up to 40000 hours and environment friendly.

## Housing

Die casting aluminium housing with corrosion resistant polyester powder coat finish.

## Glass

High intensity tempered glass in the compact frame installation provides high durability and weight resistance.


## Buying Barrel

High intensity ABS engineered plastic barrel.  
Driver: Built in IC driver.



## Design Application

Area lighting for building exterior, villa exterior, public areas and parks, car parks, garages, pool area, dock, tree, monument, walls, celebration areas, outdoor general areas.

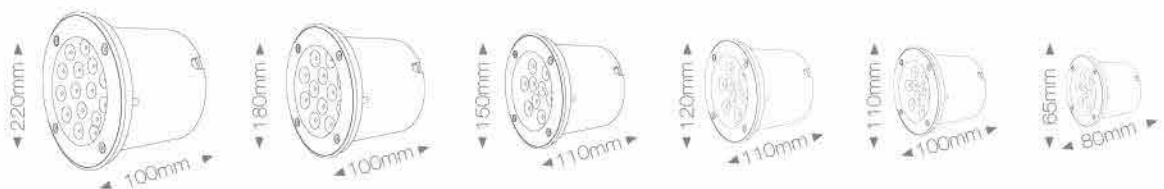

OPTIONS

LED Driver	220V	230V	240V	30Hz	60Hz	IP20	IK10	I	F	CE	BLUE COLOUR	RED COLOUR	GREEN COLOUR	YELLOW COLOUR	RGB MULTICOLOUR
------------	------	------	------	------	------	------	------	---	---	----	-------------	------------	--------------	---------------	-----------------

## Product Range and Reference

Model	Power	Voltage	CRI	Luminous Flux	Colour Temp.	Dimension	Hole Size	LED Type	IP Grade	Angle	Material
60 201	1W	220 - 240V	>80	80	CW/WW/BL/RD/GR/RGB	65 x 80	60	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass
60 204	3W	220 - 240V	>80	240	CW/WW/BL/RD/GR/RGB	110 x 100	97	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass
60 207	6W	220 - 240V	>80	480	CW/WW/BL/RD/GR/RGB	120 x 110	117	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass
60 210	9W	220 - 240V	>80	720	CW/WW/BL/RD/GR/RGB	150 x 110	143	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass
60 213	12W	220 - 240V	>80	960	CW/WW/BL/RD/GR/RGB	180 x 100	166	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass
60 219	18W	220 - 240V	>80	1440	CW/WW/BL/RD/GR/RGB	220 x 100	200	Epistal SMD	IP67	5/15/25	Aluminium+PC+PMMA+Glass