


MASTERLED

A high performance, high efficiency, low consumption LED outdoor master flood light.



Model No : LT-MA04813ACAB
 Power : 48W
 LED Qty : 48pcs
 Input Voltage : AC100-240V
 Color Temperature : 2700-7000K
 Power Factor : 0.95
 Warranty : 3 years
 Certification : TUV GS CE Rohs
 Dimension : 270 x 263 x 134.5mm

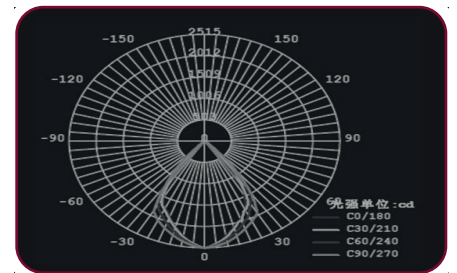

Characteristics	symbol	Min	Typ	Max	Units
Input Voltage	AC	100	220	240	V
Input Current	I	0.193	0.249	0.632	A
Power Consumption	Pd	44	52	60	W
Colour temperature	Daylight white	6000		7000	K
	Warm White	2700		3500	
LED / LEDs (1W LED)			48		PCS
Lighting Angle			9 x 120		o
Power Factor			0.95		
Efficiency			87%		
5m Luminous flux			37		LUX
Light effect			79.2		Lm/W
Illustration index	Daylight white		71		
	Warm White		61		
Operation Temp.		-40		60	°C
Store Temp		-20		55	°C
Product Application		outdoor, pool areas, sports compound, railways, ports, industrial areas, warehouse and bus stations.			
Material	6063 Aluminium + Reflector				
Reference standard	CE Rohs				
Packing	Inner Box	1pcs / Box	L35 x W35 x H21cm	6.2Kg	
	Out Box	Out Box	L37 x W37 x H41cm	13.48Kg	