

# TAMIS SURFACE SERIES

LED surface flat panel

## Product Description

### Housing

Body made of high quality, thin and light weight aluminium, easy and flexible installation, High brightness SMD LED as light source provides high lumen output, Constant current LED driver included, Optical level diffusion and guide plate,

Aluminium shell, static free, corrosion resistant, Oxidation resistant.

**Protection rating** IP20

**Colour** White




## Design Application

Office, Corridor, Halls, reception, meeting rooms, hospitals, schools, shops, laboratory, kitchens etc.

## Installation

Surface mounted.

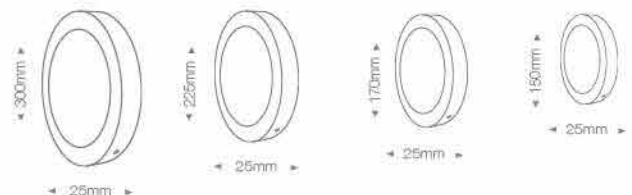

LED Driver   220V   230V   240V   50Hz   60Hz   IP20   I   F   CE   DIMMABLE Driver

## Product Range and Reference

Model	Led Type	Watt	Voltage	CGT	Dimension (mm)	Luminous Flux	IP Grade	CRI	Material
50 067	2835	6W	220-240V	6500K	120 x 25	600 lm	IP20	>75	Aluminium + PC
50 068	2835	6W	220-240V	3600K	120 x 25	600 lm	IP20	>75	Aluminium + PC
50 064	2835	12W	220-240V	6500K	170 x 25	1200 lm	IP20	>75	Aluminium + PC
50 065	2835	12W	220-240V	3500K	170 x 25	1200 lm	IP20	>75	Aluminium + PC
50 061	2835	18W	220-240V	6500K	225 x 25	1800 lm	IP20	>75	Aluminium + PC
50 062	2835	18W	220-240V	3500K	225 x 25	1800 lm	IP20	>75	Aluminium + PC
50 070	2835	24W	220-240V	6500K	300 x 25	2400 lm	IP20	>75	Aluminium + PC
50 071	2835	24W	220-240V	3500K	300 x 25	2400 lm	IP20	>75	Aluminium + PC