

# PIANURA SERIES

LED recessed downlight

## Product Description

### Housing

High purity aluminium die cast material, efficient heatsink design provides excellent heat dissipation.

### Source

LED SMD chip provides high brightness, low energy consumption and life time of up to 30000 Hours.

### Driver

Built in Constant current LED driver included. PB and HG free, environment friendly.

### Reflector

High purity aluminium reflector provides wide light distribution and high brightness, opal milky cover provides high lumen output and glare free light.



50362



50357




50356

## Design Application

Commercial area, office, shopping malls, saloons and residential areas.

## Installation

Recessed mounted.

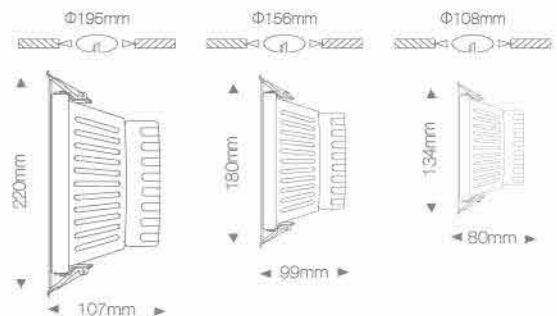

LED Driver   220V   230V   240V   50Hz   60Hz   IP20   I   F   CE   **OPTIONS**   TRIDONIC Driver   DIMMABLE Driver

## Product Range and Reference

Model	Power	Voltage	CRI	Colour Temp	Luminous Flux	Dimension	Material	Beam Angle
50356	12W	100-240	>80	6500K	1080	134 x 80 x 108	Aluminum	46 Degree
50357	12W	100-240	>80	3000K	1080	134 x 80 x 108	Aluminum	46 Degree
50359	16W	100-240	>80	6500K	1440	180 x 99 x 156	Aluminum	46 Degree
50360	16W	100-240	>80	3000K	1440	180 x 99 x 156	Aluminum	46 Degree
50362	20W	100-240	>80	6500K	1800	220 x 107 x 195	Aluminum	46 Degree
50363	20W	100-240	>80	3000K	1800	220 x 107 x 195	Aluminum	46 Degree